

BR70 *Indoor Unit*

Specifications

| Ventilation Type: Static Plate, Heat and Humidity Transfer | | | | |
|---|----|--------|---------------|-----|
| Typical Airflow Range: 30-80 CFM | | | | |
| Number Motors: One, 0.08 hp | | | | |
| V | HZ | Phase | Input Watts | FLA |
| 115 | 60 | Single | 84 @ .2" esp. | 1.0 |
| Control Voltage: 24 VAC | | | | |
| Filters: Cleanable, spun polyester media. 7 1/2" x 10 1/2" x 1" | | | | |
| Weight: 45 lbs (unit), 55 lbs (in carton) | | | | |
| Shipping Dimensions: 18" W x 27" L x 11" H | | | | |
| Options: Thru-the-Wall Kit Collar Kit | | | | |




Performance

| Net Supply Airflow CFM | ESP in. H ₂ O | Apparent Sensible EFF% | Sensible Recovery EFF% | Latent Recovery Moisture Transfer% |
|------------------------|--------------------------|------------------------|------------------------|------------------------------------|
| 35 | 0.50 | 89 | 66 | 58 |
| 51 | 0.40 | 81 | 64 | 55 |
| 63 | 0.30 | 79 | 62 | 51 |
| 79 | 0.20 | 72 | 59 | 47 |
| 90 | 0.10 | 70 | 58 | 45 |

(See HVI certification report on page 38 for complete certified rating).

Dimensions

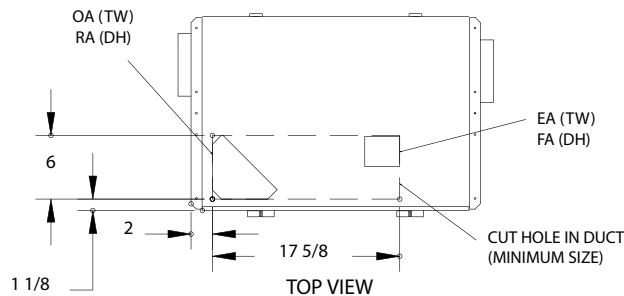

EA: Exhaust Air to outside
 OA: Outside Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

 TW: Thru Wall
 DH: Duct Hung

